



## User Manual

# 8 in 1 Combo Press




# Technical Parameters


Power	320W
Voltage	110V
Temp. System	Celsius & Fahrenheit
Temp. Range	0~482 F ; 0~250 C
Time Range	0~400 secs
Weight	32lbs.

## Heat Press Features

- 1 Pressure Handle
- 2 Pressure Knob
- 3 Digital Control Meter
- 4 Accessory Interface Port
- 5 Power Switch
- 6 Start Button :  
By pressing this the machine will start counting down after heating up to the set temp from the lowest temp
- 7 Safety Button :  
This button will bounce up automatically and interrupt the current if it is too strong. Press it again to electrify the machine

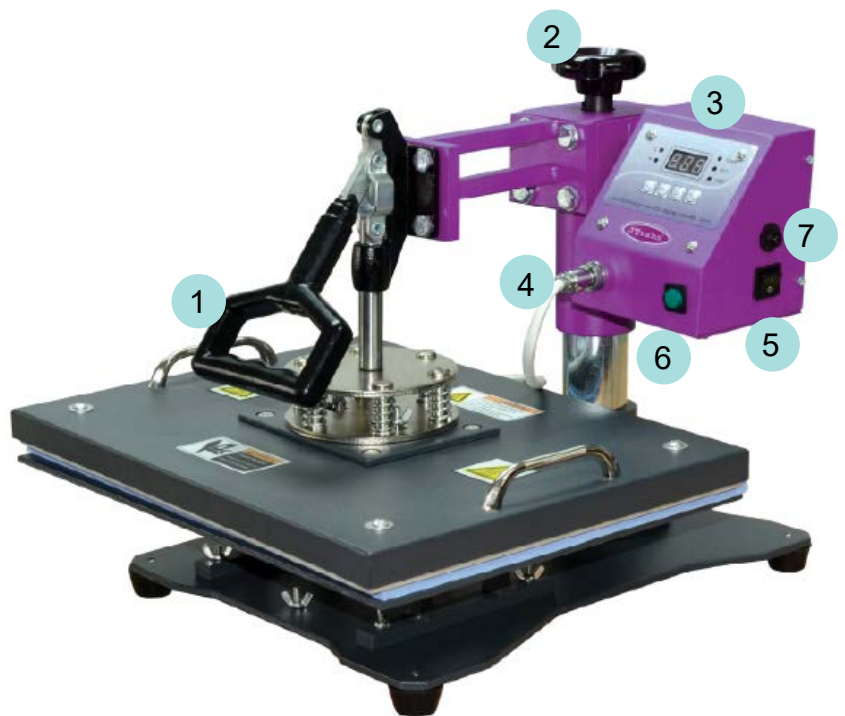

# Front Panel



## Setting Temp

Make sure you are in your preferred C / F

1. Turn on machine
2. Hit Mode 1 time, Temp & Set light should be lit up
3. Use arrows to change to desired temperature
4. Hit Mode 2 times to go back to the home screen. No lights on right side of the screen should be lit up



## Setting Time

1. Turn on machine
2. Hit Mode 2 times, Set & Time light should be lit up
3. Use arrows to change to desired time
4. Hit Mode 1 time to go back to the home screen. No lights on right side of the screen should be lit up



## Converting Celsius - Fahrenheit

1. Turn on machine
2. Use the C° / F° button to change between the two temperature readings



## Change Pressure


\*this is a manual feature and will NOT be on your digital screen

1. Locate the 2 silver knobs on machine
2. High Pressure : turn the knobs to the RIGHT
3. Low Pressure : turn the knobs to the LEFT

TIP: between adjustments open and close your press to feel the changes in pressure

# Platen Sizes

- A 2" - 3" for 5-10 oz Straight Shaped Mugs
- B 3" - 3.5" for 11-22 oz Straight Shaped Mugs
- C 3.5" - 4" for 12 oz Cone Shaped Latte Mugs
- D 3.5" - 6" for 17 oz Cone Shaped Latte Mugs
- E 6" Circular Platen
- F 4" Circular Platen
- G 5.5" x 3" Cap Platen
- H 12" x 15" Rectangular Platen

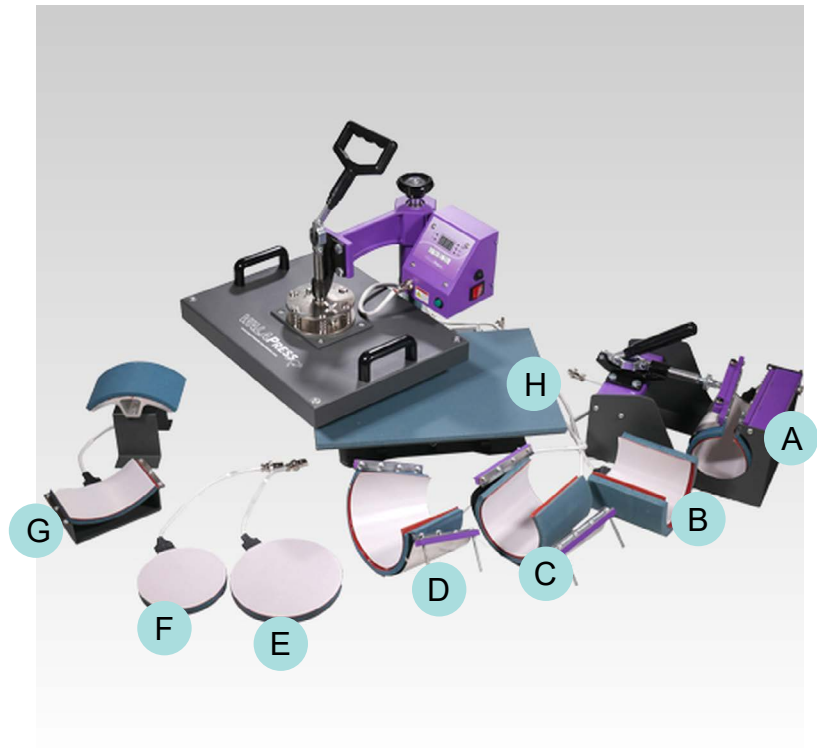

**HeatTransferWarehouse.com**

